

DuoGuard™ System Surface Mounted Connection Box



Monitoring

Installation of the connection box facilitates performance monitoring measurements of the DuoGuard™ system. Including:

- System driving voltage
- Anode current
- Reinforcing steel potential (provided reference cell is used)

The measurements can be taken with a hand held Digital Voltmeter.


Future Treatment

Following the initial treatment, the terminals inside the connection box allow the re-application of DC voltage at any time in the future.

Dimensions

Length	94 mm
Width	94 mm
Depth	57 mm

The connection blocks inside the box fit onto a standard DIN rail, meaning they can be entirely customised to suit any site.

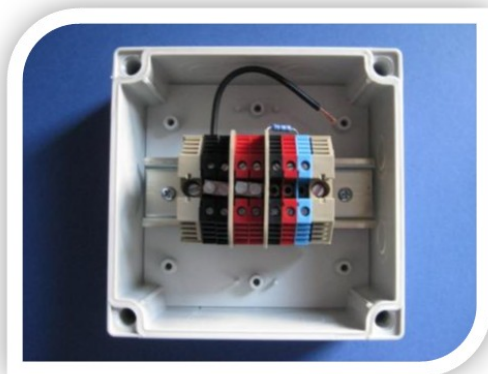

Material

1. Polycarbonate
2. Grey RAL 7035
3. Non flammable
4. IP66
5. Temperature resistant up to 70°C
6. Glow Wire Test °C: 960

Contact Details

For technical and sales support please contact us at;

E-mail: nigeld@cp-tech.co.uk

Address:
Enterpriselab, The Sir Colin Campbell Building
University of Nottingham Innovation Park
Triumph Road
Nottingham
NG7 2TU

Telephone +44 (0)115 8229 430
Fax +44 (0)115 9220 316

www.cp-tech.co.uk