

TECHNICAL DATASHEET

Polymeric Screw Connector

The screw connector is used in the installation of DuoGuard, PatchGuard Connect and ProtectorJoint corrosion protection systems



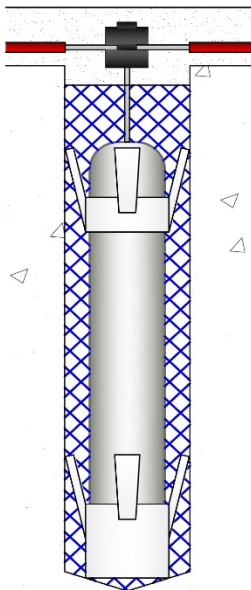

Uses

The corrosion resistant screw connector is used in the installation of DuoGuard™, Patchguard Connect™ and ProtectorJoint™ corrosion protection systems to connect the anode to the XLPE coated titanium feeder wire.

Description

The screw connector assembly consists of two parts: a slotted screw and a knurled nut.

The wires to be joined are placed in the slot before the nut is screwed down to create a strong and secure connection for current delivery.



Specification

| | |
|----------|-----------------|
| Material | Nylon 6 + 30%GF |
| Colour | Black |

Technical and Sales Support

w: www.cp-tech.co.uk

t: +44 (0) 115 9724 238

e: general@cp-tech.co.uk



Certificate Number 10159
ISO 9001, ISO 14001




For technical and sales support please contact us at:

Concrete Preservation Technologies

1 Palmer Business Court, Manor House Road, Nottingham, UK, NG10 1LZ

(T) +44 (0) 115 9724 238 (E) general@cp-tech.co.uk

www.cp-tech.co.uk